

2024

ELECTRICAL METER SERVICES SPECIFICATION GUIDE

Revision 1.0 March 13, 2024

```
Table of Contents • 1
Introduction • 2
Disclaimers • 2
VOG contacts • 3
Definitions • 4
VOG Meter Services department requirements for approval of connection to VOG
Utility•4
General • 4
Grounding • 4 Meter location • 5
Meter identification • 5
Meter sockets • 5
Seals • 6
Temporary services • 6
VOG services • 6
   Residential service • 7
   Commercial and industrial electric service • 7
      Service at voltages over 240 volts • 8
      Three-phase self-contained metering
      (320 amp maximum, not exceeding 240 volts) • 8
      480-volt cold sequence Meter socket • 8
      Current transformer cabinet requirements • 8
      Transformer rated metering services • 9
      Free standing switchgear • 9
Appendix • 10
```

1

INTRODUCTION

This guide provides detailed requirements for electrical equipment installations at the Point of Delivery for all metered services. The goal is to provide customers, electrical contractors, architects, engineers, and electrical inspectors quick access to specific, detailed *Village of Greenwood*, Nebraska, hereafter referred to as VOG, Meter Services department rules and requirements not otherwise contained in the VOG Service Regulations.

DISCLAIMERS

- If there are any conflicts between this document and VOG Service Regulations, the VOG Service Regulations shall take precedence.
- If there are questions not covered in this guide, contact VOG City Office at 402.789.2300.
- VOG is not responsible for the quality, sufficiency or safety of customers' wiring or equipment.
- All electrical installations must be inspected and approved by the Authority Having Jurisdiction prior to VOG providing electric service.
- Large commercial or industrial installations require a consultation with VOG to determine service metering requirements.
- VOG reserves the right to refuse to provide connectivity to electrical installations which do not
 meet the requirements of this guide or the VOG Service Regulations or which are not installed in
 accordance with requirements of the National Electrical Code (NEC), the National Electrical
 Safety Code or any state or local law or regulation.
- The contents of this document may change based on best available technology or VOG requirements.
- If there are questions as to the meaning or definition of a word used in the text, reference should be made to the National Electrical Safety Code, the NEC and/or VOG Service Regulations.
- VOG provides electrical distribution services at 60 Hertz alternating current. If there are
 questions regarding the voltage and the number of phases requiring service or the character,
 size, or location of the load that are unanswered in this document, consult with VOG prior to
 purchasing equipment or wire installation.
- VOG meters all electric energy consumption, with a few exceptions. Contact VOG for demand or reactive metering, or other rate options that may be available.

VOG CONTACTS

Village of Greenwood – Electrical Utility Village Clerk/Treasurer

Billing / Meter Services Department

402.789.2300

Village of Greenwood - Mailing Address

Village of Greenwood – Electrical Department

619 Main Street

Greenwood, NE 68366

3

METER SERVICES SPECIFICATION GUIDE

DEFINITIONS

Authority Having Jurisdiction: Defined in the NEC as an organization, office or individual responsible for enforcing the requirements of a code or standard or for approving equipment, materials, an installation, or a procedure.

Meter: The device or devices, including all auxiliary equipment necessary to measure and register an electrical quantity (energy, demand, and reactive power), that is supplied by VOG to a customer at a Point of Delivery between VOG and a customer. For underground secondary service, the Meter will be the Point of Delivery.

Point of Delivery: The locations where VOG supplies service to a customer and which, unless otherwise agreed upon between VOG and the customer, shall be the point where the Service Wires are joined to the customer's Meter.

Service Drop:

Conductors/Overhead — Service Wires extending from the last pole or other aerial support, including splices, if any, connecting to the Point of Delivery at the customer's building or other structure. See Figure 11 (page 22).

Conductors/Underground — Service Wires between the pedestal, transformer, riser pole or other last point of supply and the first point of connection to the service-entrance conductors in a terminal box, meter or other enclosure inside or outside of a building.

Service Wires: VOG lines connecting the VOG distribution system to a customer's Point of Delivery.

VOG METER SERVICES DEPARTMENT REQUIREMENTS FOR APPROVAL OF CONNECTION TO VOG

GENERAL

- Always consult with VOG prior to purchase and installation of demand or energy controls.
- VOG can furnish energy and/or time pulses at the customer's cost.
- Load monitoring equipment can only be installed on the load side of the Meter. No customer or third-party equipment can be attached to the Meter, associated metering equipment, or inside a Meter or current transformer enclosure.

GROUNDING

- All metallic conduits, metallic tubing and service entrance equipment shall be grounded in accordance with the latest version of the NEC.
- Equipment grounding conductors shall not be installed along with the Service Drop conductors being installed to the secondary compartment of VOG pad-mount transformers.

METER LOCATION

- All Meters or metering equipment shall be located on the exterior of a structure.
- VOG will provide the Meter specifications for indoor metering if location on the exterior of a structure is not practical.
- VOG must approve the relocation of a Meter from its existing location.
- See Figure 1 (page 12) and Figure 2 (page 13).

METER IDENTIFICATION

- On multi-occupancy buildings, all Meter sockets (including the inside of the socket and cover)
 and main service disconnect switches shall be plainly and permanently marked with numbers
 and/or letters by the owner to indicate the building address or apartment address served. The
 markings must be either engraved nameplates or clearly legible adhesive-type labels at least
 one inch high.
- Service will not be established until marking is complete. Felt tip pens and label maker tape are not considered permanent markings.
- VOG is not responsible for and will not adjust erroneous customer billing resulting from
 mislabeled Meter sockets or cross-wiring to a service entrance within the building's electrical
 system. A fee will be assessed to the property owner each time per VOG Service Regulations.

METER SOCKETS

- All new Meter sockets installed in the VOG service area shall be a minimum of 200 amps.
- This requirement also applies to any rewired repair service work.
 - o Exception 100-amp Meter sockets will be allowed on gang sockets of (3) or more.
 - o Exception On Overhead (OH) services 100-amp Meter sockets will be allowed on rewires. VOG must approve prior to installation.
- Meter sockets purchased by the customer shall be UL listed and labeled in accordance with NEC.
- Transformer rated Meter socket requirements:
 - o Durham Catalog No. STL8-1C or Milbank Catalog No. UC7444-XL for single-phase installations.
 - o Durham Catalog No. STL13-1C or Milbank Catalog No. UC7445-XL for three-phase installations.
- Commercial self-contained Meter sockets:
 - o All single and three-phase Meter sockets used in a commercial application shall be equipped with Meter bypass lever, this is a "ringless" type socket.
 - o "Horn" bypass designs are prohibited.
 - o Bypass Meter sockets will not be required for temporary services.
- Meter centers:
 - o All multi-occupancy residential Meter centers with three or more Meter sockets shall use ring-type Meter sockets.
 - o Ringless and ring-type Meter sockets may be used in duplex Meter sockets.

- o Single Meter sockets may be ringless or ring-type.
- o Standalone Meter pedestals:
 - VOG will accept permanent installation of single-phase, free standing NEMA 3R pedestals rated 100 or 200 amps. Pedestals must be equipped with a removable bottom cover to allow for lay-in wiring on post line connectors. Line side termination point must accommodate 4/0 AWG. Pedestal shall include steel latch and hasp assembly with padlock provisions. Pedestal shall meet VOG and NEC compliance, be UL listed and have a minimum of 22kAIC amps RMS symmetrical short circuit rating at 600 volts. Working clearance shall be maintained at 36 inches from face of Meter and from any access panel. Minimum Meter height shall be at least 36 inches from ground level.

SEALS

- All enclosures containing unmetered conductors shall be capable of being effectively sealed or locked by VOG.
- The breaking of seals by anyone other than an authorized person (licensed electrician) or tampering with VOG Meters or monitoring/measuring devices is prohibited.
- When VOG detects that its Meter or other equipment has been tampered with in a manner that
 may allow unauthorized use or loss of energy measured at the Meter, VOG shall discontinue
 the supply of electric energy to the customer at any time without notice. The Meter and other
 equipment will be removed until the customer has corrected the condition to the satisfaction
 of VOG. (See the <u>VOG Service Regulations</u>.)

TEMPORARY SERVICES

- VOG will furnish temporary service in accordance with the requirements of the VOG Service Regulations.
- See Figures 3-5 (pages 14-16).

VOG SERVICES

- VOG will install Service Wires to the Point of Delivery as specified by VOG.
- Overhead Service Wires will be installed only to a properly secured and anchored overhead mast or properly sized and anchored attachments on a structure.
- See Figures 6-8 (pages 17-19).
- NOTE: Electric poles that are now part of the VOG system due to the acquisition of service
 area from other electric and communication utilities, particularly those located in rural areas
 and on acreages, must conform to VOG Service Drop requirements if any modifications are
 made to the configuration of the electric system on the property.

RESIDENTIAL SERVICE

Residential electric service will be supplied by:

- o A three-wire, single-phase system, nominally 120/240 volts.
- o Self-contained metering for single-phase 120/240 volts, for a total of main switches not exceeding 400 amps.
- o VOG permits self-contained metering for four-wire, three-phase 120/208 volts, for a total of main switches not exceeding 400 amps.
- o VOG requires services exceeding a sum of 400 amps on all main switches to be current transformer (CT)metered.
- o Additional requirements:
 - Installations with nominal voltage up to 240 volts with anticipated load or demand of VOGs than 200 amps require a self-contained Meter and Meter socket.
 - Installations with nominal voltage up to 240 volts with anticipated load or demand between 200 amps and 400 amps continuous (400 amp main, rated 80%) may use a self-contained Class 320 Meter.
 - All NEW single-family residences, rewired underground or overhead services, require a 200-amp ringless or ring-type socket with minimum dimensions of 14" x 11" x 41/8".
 - All underground services shall have a UL approved expansion joint supplied with the service supply conduit. Expansion joints shall not be clamped to restrict movement.

COMMERCIAL AND INDUSTRIAL ELECTRIC SERVICE

Commercial and industrial electric service will be supplied by secondary distribution with a three-wire, single-phase system or a four-wire, three-phase system.

Additional requirements:

- o Self-contained metering is allowed for single-phase 120/240 volt, for a total of main switches up to and including 320-amp services.
- o See Figure 9 (page 20) and Figure 10 (page 21).
- o Installations with anticipated load or demand between 200 amps and 320 amps (sum) may use a Class 320 Meter.
- o Network metering on commercial and multi-occupancy residential services with 120/208 voltage, three-wire service on a single-phase Meter socket requires a fifth terminal to be installed horizontally at the 9 o'clock position (looking at the socket).

7

o Service at voltages over 240 volts

- See <u>VOG Service Regulations</u> for service voltage availability.
- VOG does not provide service to new 480 volt, three-phase, three-wire installations.

o Three-phase self-contained metering (320 amp maximum, not exceeding 240 volts)

- VOG permits self-contained metering on three-phase, four-wire, single main not exceeding 320 amp (sum) for commercial services.
- VOG approval is required for factory assembled Meter centers that have three-wire or a 120/208 volts AC (VAC), three-phase, four-wire service.
- Temporary overhead and underground 400-amp 120/240 VAC, single-phase three-wire and 120/208 or 120/240 three-phase, four-wire services will be allowed in lieu of CT metering.
- All three-phase services of 240 volts that do not exceed 200 amps (sum) will be metered with a self-contained Meter and a self-contained, seven-terminal, ringless lever, bypass-equipped Meter socket that meets NEC requirements and is UL approved.
- VOG will not provide secondary service to any three-phase, three-wire service.
- Available fault current may limit its use.

o 480-volt cold sequence Meter socket

- Approval from VOG must be obtained for each use of the socket. Available fault current will limit its use.
- Only a UL listed single-unit assembly of a Meter socket and line-side Meter disconnect that is immediately adjacent to the Meter socket and equipped with a Meter bypass will be allowed for:
 - o 200/320-amp five terminal single-phase, three-wire 240/480 or 277/480 volt.
 - o 200/320-amp seven terminal three-phase, four-wire sockets for three-phase 277/480-volt services.
 - o NOTE: A lockable/sealable socket cover and disconnect is required.
- New sockets will be permanently manufacturer-marked 480 volts.
- The socket can be used for overhead or underground services. Model numbers will be specified.

o Current transformer cabinet requirements

The minimum sizes required are:

- Single-phase 600 amp and below:
 - o Minimum cabinet size is 30" x 26" x 10".
- Single-phase above 600 amp, up to and including 1200 amp:
 - o Minimum cabinet size is 36" x 36" x 11".

- Three-phase 800 amp and below:
 - o Minimum cabinet size is 36" x 36" x 11".
- Three-phase above 800 amp, up to and including 1000 amp:
 - o Minimum cabinet size is 48"x 36"x16".
 - o Hoffman Free Standing Enclosure #A60R3618FSLP is also accepted (1200 amps @ 208 VAC).
- Three-phase above 1200 amp, up to and including 1800 amp:
 - o Minimum cabinet size is 48" x 48" x 11".
 - o Hoffman Free Standing Enclosure #A60R5218FSLP is also accepted (1200 amp @ 480 VAC).
- Three-phase above 2000 amp, up to but NOT including 3000 amp:
 - o Minimum cabinet size is 60" x 52" x 18".
 - o Hoffman Free Standing Enclosure #A60R5218FSLP is also accepted.
- Three-phase 3000 amp:
 - o Minimum cabinet size is 60" x 72" x 24".
 - o Hoffman Free Standing Enclosure #A60R7224FSLP is also accepted.
- Services above 1500 amps:
 - VOG will allow metering transformers in customer switchgear.
 Contact VOG Design and Meter Services departments in advance.

Transformer rated metering services

- Commercial and industrial services over 320 amps as well as large residential services over 400 amps if service voltage exceeds 240 volts will be metered using instrument transformers current transformers and voltage transformers.
- Current transformer compartments. See Figure 12 (page 23):
 - o Must have a hinged door that can be padlocked.
 - o Must be approved by VOG.
 - Must have unobstructed access to the compartment and adjacent Meter socket.
 - Meter socket must be outside of the building.
 - Metering conduits (above grade) shall be a minimum of 1" inch and in a continuous rigid (RMC, IMC) conduit, no junction boxes or LB's allowed.
 - o Free-standing switchgear services with current transformer compartment installations require consultation and approval by VOG.

o Free-standing switchgear


The following requirements must be met for free-standing switchgear:


- 1000 to 2000A:
 - o A 40" minimum vertical distance from the nearest terminal to the upper or lower-most part of the enclosure;
 - o A 25" minimum width; and
 - o A 25" minimum depth of enclosure.
- 2500A:
 - o A 40" minimum vertical distance from the nearest terminal to the upper or lower-most part of the enclosure;
 - o A 36" minimum width; and
 - o A 36" minimum depth of enclosure.
- 3000A to 4000A:
 - o A 40" minimum vertical distance from the nearest terminal to the upper or lower-most part of the enclosure;
 - o A 48" minimum width; and
 - o A 48" minimum depth of enclosure.


VOG SERVICE AREA ACOUISITIONS

- o Existing services are grandfathered.
- o If any upgrades or modifications are made, these services must be configured to meet all VOG requirements contained in this guide and in the <u>VOG Service Regulations</u>.

Figure 1	Unobstructed Meter access • 12
Figure 2	Preassembled multiple Meter installation • 13
Figure 3	Temporary service installation from existing Underground Residential District (URD) Secondary • 14
Figure 4	Alternate temporary service Installation from Existing URD Secondary • 15
Figure 5	Temporary service installation from existing overhead secondary • 16
Figure 6	Service Drop cable clearances for duplex, triplex and quadruple X conductors • 17
Figure 7	Service attachment to mast of low profile or other building • 18
Figure 8	Single-phase underground service Meter installation • 19
Figure 9	Self-contained Meter diagrams (single-phase) • 20 Figure
10	Self-contained Meter diagrams (three-phase) •21
Figure 11	Overhead service drop connections • 22
Figure 12	Cable & conduit specifications Norris/VOG acquired service • 23







VOG WILL BE RESPONSIBLE FOR:


- (a) ASSISTING THE CUSTOMER IN LOCATING THE METER IN A SUITABLE LOCATION.
- (b) $\ \, \text{ACCESSING THE METER FOR MAINTENANCE AND CONTROL PURPOSES}.$

THE CUSTOMER WILL BE RESPONSIBLE FOR:

- (a) COORDINATING WITH VOG TO ENSURE A SUITABLE LOCATION FOR THE METER.
- (b) PROVIDING UNOBSTRUCTED ACCESS TO ALL VOG EQUIPMENT.
- $\hbox{(c)} \quad \text{PROVIDING VOG WITH UNRESTRICTED ACCESS TO BUILDINGS THAT HAVE METERS MOUNTED INTERNALLY}.$
- (d) IF ACCESS CANNOT BE PROVIDED TO VOG, TRANSFERRING METERS TO THE EXTERIOR OF THE BUILDING AT CUSTOMER'S EXPENSE.

* SEE VOG SERVICE REGULATIONS FOR DISCONNECTING SERVICE METER THAT IS OBSTRUCTED OR INACCESSIBLE.

UNOBSTRUCTED METER ACCESS	DATE: 3 May 2016
UNOBSTRUCTED METER ACCESS	FIGURE: 01

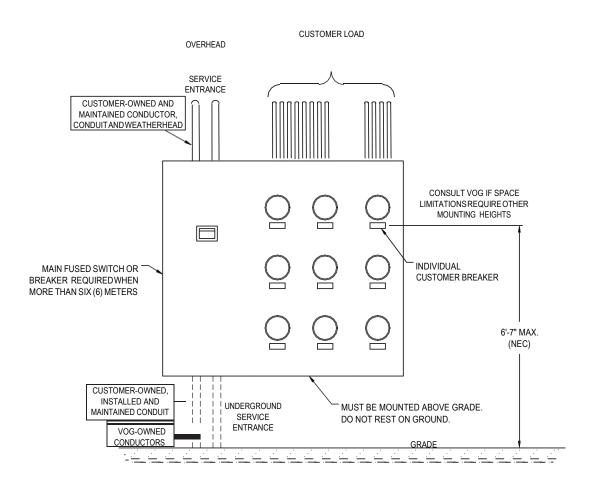


- (1) CUSTOMER MUST CONSULT WITH VOG FOR POINT OF DELIVERY PRIOR TO INSTALLATION.
- (2) CUSTOMER WORK MUST BE COMPLETED AND INSPECTED BEFORE VOG WILL PROVIDE SERVICE.
- (3) CUSTOMER SHALL BE RESPONSIBLE FOR FURNISHING, INSTALLING, AND CONNECTING ALL SERVICE ENTRANCE WIRING FROM TERMINAL BOX OR MAIN DISCONNECT TO METER SOCKETS AND FOR ENSURING THAT TERMINAL BOX OR MAIN DISCONNECT HAS PROPER NUMBER, SIZE, AND TYPE OF TERMINALS TO ACCEPT VOG SERVICE LATERAL.
- (4) WIRE WAYS OR MAIN DISCONNECTS FOR UN-METERED CONDUCTORS SHALL HAVE PROVISIONS FOR BEING EFFECTIVELY SEALED OR LOCKED BY VOG PERSONNEL.

LINE AND LOAD CONDUCTORS SHALL NOT PASS THROUGH OR BE MIXED IN THE SAME WIRE-WAY, TROUGH OR MAIN-LINE DISCONNECT.

* SEE VOG SERVICE REGULATIONS FOR LABELING MULTIPLE METERS.

PREASSEMBLED MULTIPLE METER INSTALLATION	DATE: 21 May 2019
PREASSEMBLED MOLTIPLE METER INSTALLATION	FIGURE: 02

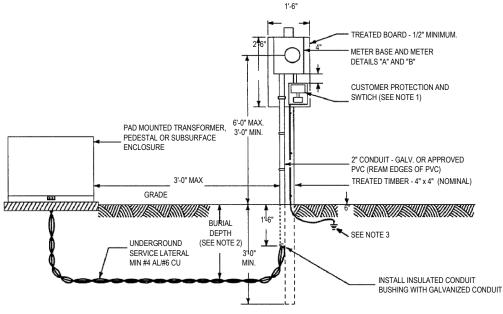

GENERAL CONDITION NOTES:


VOG WILL BE RESPONSIBLE

FOR:

- (a) COMPLETING THE TRENCHING TO EITHER THE TRANSFORMER OR THE SECONDARY PEDESTAL AND MAKING THE CONNECTIONS TO THE UNDERGROUND SERVICE LATERAL TO EITHER THE TRANSFORMER OR SECONDARY PEDESTAL.
- (b) INSTALLING AND REMOVING THE METER.
- (c) DISCONNECTING THE CONNECTIONS IN THE TRANSFORMER OR SECONDARY PEDESTAL AND REMOVING THE METER.

THE CUSTOMER WILL BE RESPONSIBLE FOR:

- (a) PROVIDING AND INSTALLING THE TEMPORARY STRUCTURE, PROTECTION AND SWITCH, CONDUIT, UNDERGROUND SERVICE LATERAL AND CABLE TERMINAL
 - LUGS (IF NEEDED), GROUND ROD, GROUND CLAMP, AND GROUND WIRE.
- (b) TRENCHING THE DESIGNATED DISTANCE BETWEEN THE TEMPORARY POST AND VOG' TRANSFORMER OR PEDESTAL. CUSTOMER TO DETERMINE LOCATION OF ALL UTILITIES BEFORE TRENCHING.
- (c) PROVIDING WEATHERPROOF (OR COVERED) SERVICE ENTRANCE EQUIPMENT
 - (UL LISTED WITH FUSED DISCONNECT SWITCH OR CIRCUIT BREAKER 3 WIRES). EQUIPMENT SHALL BE SIZED AS REQUIRED AND MOUNTED ON A BOARD BASE.
- (d) SECURELY MOUNTING THE METER BASE IN A PLUMB POSITION
- (e) MAKING ALL CONNECTIONS IN THE METER SOCKET.
- (f) PROVIDING THE INSPECTION IF NECESSARY.
- (g) REMOVING EQUIPMENT AFTER BEING DISCONNECTED.

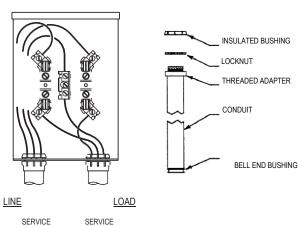

GENERAL CONSTRUCTION NOTES:

DETAIL "A"

- (1) CUSTOMER PROTECTION AND SWITCH MAY REQUIRE CURRENT LIMITING FUSES TO COMPLY WITH LOCAL CODES.
- (2) BURIAL DEPTH IS THE DISTANCE BETWEEN FINAL GRADE AND THE TOP OF THE BURIED CABLE OR CONDUIT. VOG SHALL SPECIFY THE REQUIRED BURIAL DEPTH TO CONFORM TO LOCAL REQUIREMENTS. THE BURIAL DEPTH SHALL NOT BE VOGS THAN 2'-6".


DETAIL "B"

RISER ASSEMBLY

(3) CUSTOMER GROUNDING WILL BE IN ACCORDANCE WITH NEC. THE GROUND WIRE SHALL BE CONNECTED TO THE METER SOCKET.

TEMPORARY SERVICE INSTALLATION
FROM EXISTING URD SECONDARY

DATE: 3 May 2016
FIGURE: 03

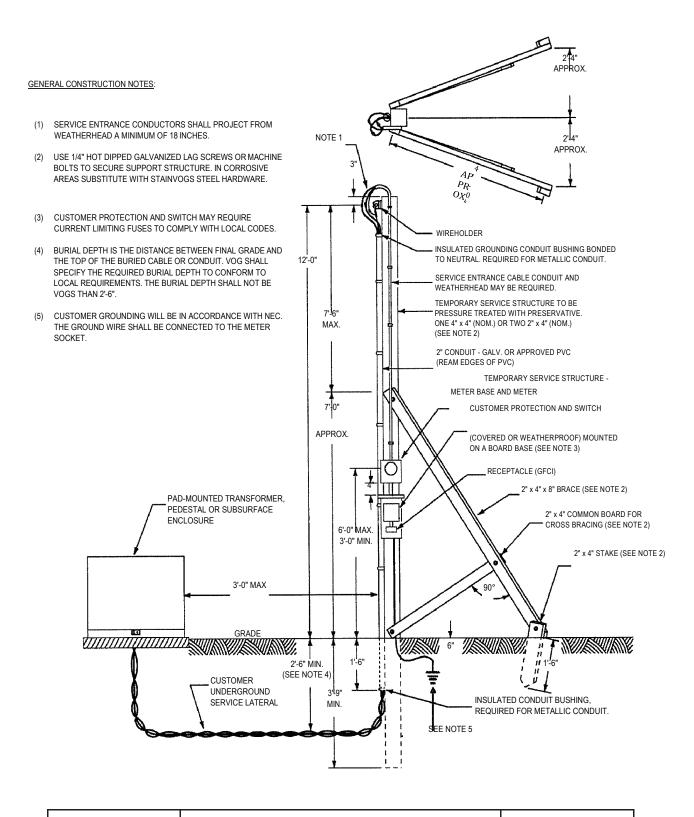

ALTERNATE TEMPORARY SERVICE INSTALLATION FROM EXISTING URD SECONDARY

DATE: 3 May 2016

GENERAL CONDITION NOTES:

VOG WILL BE RESPONSIBLE

FOR:

(a) PROVIDING AND INSTALLING OVERHEAD SERVICE DROP

(#2 OR #4 TRIPLEX SERVICE DROP).

(b) INSTALLING AND REMOVING THE METER.


THE CUSTOMER WILL BE RESPONSIBLE FOR:

(a) PROVIDING AND INSTALLING THE COMPLETED TEMPORARY STRUCTURE TO WHICH SERVICE DROP WILL BE ATTACHED. INSTALLATION MUST MEET VOG' REQUIREMENTS. SERVICE ENTRANCE CONDUCTORS SHALL PROJECT A MINIMUM OF 18 INCHES FROM WEATHERHEAD.

NOTE: A TOOL SHED (IF AVAILABLE) OR OTHER TYPE OF FIXED SUPPORT MAY BE USED AS A TEMPORARY SERVICE DROP ATTACHMENT IF SUCH SUPPORT PROVIDES EQUAL STRENGTH AND PROPER CLEARANCES.


GENERAL CONSTRUCTION NOTES:

- (1) TEMPORARY SERVICE DROPS NOT TO EXCEED 100 FEET.
- (2) THE SERVICE ATTACHMENT SHALL BE INSTALLED AT A HEIGHT THAT MAINTAINS PROPER CLEARANCES FOR SERVICE DROP CONDUCTORS. REFER TO FIGURE 6.
- (3) CUSTOMER FUSE BOX AND SWITCH MAY REQUIRE CURRENT LIMITING FUSES TO COMPLY WITH LOCAL CODES.
- (4) USE 1/4" x 4" HOT DIPPED GALVANIZED LAG SCREWS OR MACHINE BOLTS TO SECURE SUPPORT STRUCTURE. IN CORROSIVE AREAS SUBSTITUTE WITH STAINVOGS STEEL HARDWARE.
- (5) A 2" x 4" STAKE IS RECOMMENDED BUT DEPENDENT ON SOIL CONDITIONS. OTHER MATERIAL SUCH AS CONCRETE FORM STAKES MAY BE USED TO SECURE THE SUPPORT STRUCTURE.
- (6) CUSTOMER GROUNDING WILL BE IN ACCORDANCE WITH NEC. THE GROUND WIRE SHALL BE CONNECTED TO THE METER SOCKET.

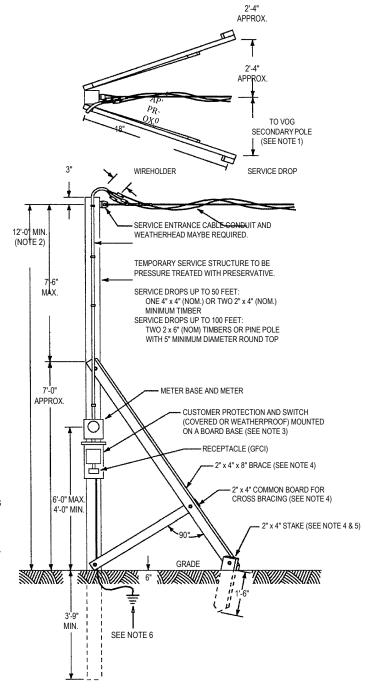

TEMPORARY SERVICE INSTALLATION FROM EXISTING OVERHEAD SECONDARY

DATE: 3 May 2016

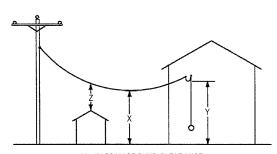

X = IN-SPAN GROUND CLEARANCE

- Y = DRIP LOOP GROUND CLEARANCE
- Z = ROOF OR BALCONY CLEARANCE

NOTES:

(1) ALL CLEARANCES LISTED ARE SPECIFIED BY THE NESC. THESE ARE MINIMUM CLEARANCES THAT MUST BE MET FOR THE SAG CONDITION THAT CAN OCCUR EITHER AT: MAXIMUM OPERATING CONDUCTOR TEMPERATURE OR MAXIMUM LOADING AT 32°F, NESC ICE, FINAL SAG.

AN INCREASE IN DESIGN CLEARANCE AT TIME OF INSTALLATION IS RECOGNIZED AND ACCEPTABLE TO ACCOUNT FOR FUTURE RESURFACING OR GRADE CHANGES. A 12 INCH INCREASE IS TYPICAL IN LIEU OF ANY SPECIFIC INFORMATION. IT IS RECOMMENDED THAT THIS FACTOR SHOULD BE CONSIDERED AND, AS APPROPRIATE, INCLUDED WHEN PLANNING SERVICE INSTALLATIONS.

NOTE: A POINT OF CLARIFICATION IS NECESSARY REGARDING WHAT CAN APPEAR TO BE A 2 FOOT INCONSISTENCY BETWEEN THE NESC AND THE NEC FOR CLEARANCES OVER "ROADS, STREETS, DRIVEWAYS, PARKING LOTS, ALLEYS AND OTHER AREAS SUBJECT TO TRUCK TRAFFIC" (NESC - 16 FEET vs. NEC - 18 FEET). NEC CLEARANCES ARE SPECIFIED (WITH VOGS SAG) AT A CONDUCTOR TEMPERATURE OF 60°F, NO WIND, WITH FINAL UNLOADED SAG IN THE CONDUCTOR. THE 2 FOOT DIFFERENCE IS PARTIALLY ATTRIBUTED TO COMPARATIVELY LARGER SAG BY NESC SPECIFICATIONS. ADDITIONAL ALLOWANCES MADE FOR RESURFACING, ETC. IN APPLICATION OF THE NESC RULE WILL ACCOUNT FOR THE REST OF THE 2 FOOT DIFFERENCE. A SERVICE INSTALLED TO EITHER SPECIFICATION WOULD BE VERY SIMILAR WHEN ANALYZED BY THE OTHER. THEREFORE, THERE IS NO PRACTICAL INCONSISTENCY BETWEEN THE TWO CODES IN THIS SITUATION.

(2) IN ADDITION TO PROPER DESIGN FOR GROUND/SURFACE CLEARANCES, BE CAREFUL TO PROVIDE CLEARANCES FROM BUILDING OPENINGS, WINDOWS, DOORS, ETC. (TYPICALLY, 3'-0"). PROVIDE A MINIMUM CLEARANCE OF THREE

(3) INCHES FROM DOWNSPOUTS AND EAVES FOR SERVICE CONDUCTORS 0 TO 750 VOLTS. FOR CONDUCTORS MEETING NESC RULE 230C1, 230C2, OR 230C3 THIS CLEARANCE MAY BE REDUCED TO ONE (1) INCH. ROUTE SERVICES SO THAT RAISED PATIO/DECK AREAS CAN BE AVOIDED IF POSSIBLE. AS AN ALTERNATIVE, CONSIDER PROVIDING ADDITIONAL CLEARANCE, WHEN FEASIBLE.

(3) TRUCKS ARE DEFINED AS ANY VEHICLE WITH A MAXIMUM 14 FEET IN HEIGHT.
AREAS NOT SUBJECT TO TRUCK TRAFFIC ARE AREAS WHERE TRUCK TRAFFIC
IS NOT NORMALLY ENCOUNTERED NOR REASONABLY ANTICIPATED.

SERVICE DROP CABLE CLEARANCES

NATURE OF SURFACE UNDERNEATH SERVICE DROP CABLE	VERTICAL CLEARANCE ABOVE SURFACE FOR SERVICE DROP CABLE (SEE NOTES 1 & 2)
TRACK RAILS OF RAILROADS	24'-6"
ROADS, STREETS, DRIVEWAYS, PARKING LOTS, ALLEYS ANDOTHER AREAS SUBJECT TO TRUCKTRAFFIC (SEE NOTE 3)	16'-6"
DRIVEWAYS, PARKING LOTS, AND ALLEYS	16'-6"
SPACES AND WAYS SUBJECT TO PEDESTRIANS OR RESTRICTED TRAFFIC ONLY (SEE NOTE 5)	12'-6"
ACCESSIBLE ROOFS OR BALCONIES	11'-0"
SWIMMING POOLS	22'-0"

(4) FOR RESIDENTIAL DRIVEWAYS ONLY, WHEN A BUILDING DOES NOT HAVE SUFFICIENT HEIGHT TO ALLOW A SERVICE ATTACHMENT LOCATION WHICH WILL PROVIDE 15 FEET CLEARANCE, THE CLEARANCES MAY BE REDUCED TO:

SERVICES 277 VLG:

IN-SPAN GROUND CLEARANCE - 12.5 FEET DRIP LOOP GROUND CLEARANCE - 10.5 FEET

SERVICES 120 VLG:

IN-SPAN GROUND CLEARANCE - 12.0 FEET DRIP LOOP GROUND CLEARANCE - 10.0 FEET

- (5) SPACES AND WAYS SUBJECT TO PEDESTRIAN OR RESTRICTED TRAFFIC ONLY ARE THOSE AREAS WHERE RIDERS ON HORSEBACK, VEHICVOG OR OTHER MOBILE UNITS EXCEEDING 8 FEET IN HEIGHT, ARE PROHIBITED BY REGULATION OR PERMANENT TERRAIN CONFIGURATIONS OR ARE OTHERWISE NOT NORMALLY ENCOUNTERED NOR REASONABLY ANTICIPATED.
- (6) FOR RESIDENTIAL DRIVEWAYS ONLY, WHEN A BUILDING DOES NOT HAVE SUFFICIENT HEIGHT TO ALLOW A SERVICE ATTACHMENT LOCATION WHICH WILL PROVIDE 12 FEET CLEARANCE, THE CLEARANCES MAY BE REDUCED TO:

SERVICES 277 VLG:


IN-SPAN GROUND CLEARANCE - 10.5 FEET DRIP LOOP GROUND CLEARANCE - 10.5 FEET

SERVICES 120 VLG

IN-SPAN GROUND CLEARANCE - 10.0 FEET DRIP LOOP GROUND CLEARANCE - 10.0 FEET


- (7) WHERE ROOFS OR BALCONIES ARE NOT READILY ACCESSIBLE AND WHERE VOLTAGE BETWEEN SERVICE CONDUCTORS DOES NOT EXCEED 300 VOLTS OR WHERE CABLES MEETING NESC RULE 230C2 OR 230C3 AND VOLTAGE DOES NOT EXCEED 750 VOLTS, CLEARANCE REDUCED TO 3.0 FEET.
- (8) CLEARANCE IN ANY DIRECTION FROM THE POOL WATER LEVEL, EDGE OF POOL, BASE OF DIVING PLATFORM OR ANCHORED RAFT. CLEARANCE INANY DIRECTION TO A DIVING PLATFORM IS 14 FEET.

SERVICE DROP CABLE CLEARANCES FOR DUPLEX,	DATE: 1 Sep 2016
TRIPLEX, AND QUADRUPLE X CONDUCTORS	FIGURE: 06

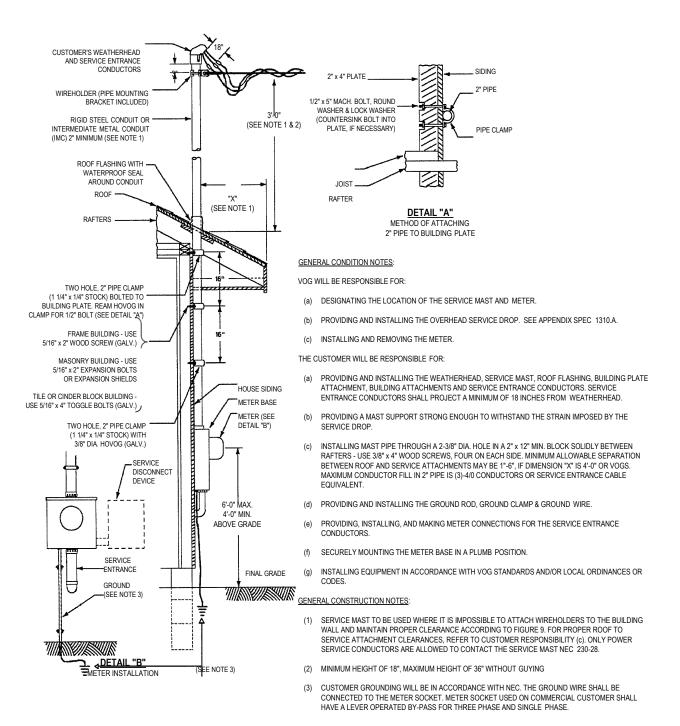



SERVICE ATTACHMENT TO MAST OF LOW PROFILE OR OTHER BUILDING

DATE: 1 Sep 2016



(ALTERNATE CONFIGURATION)



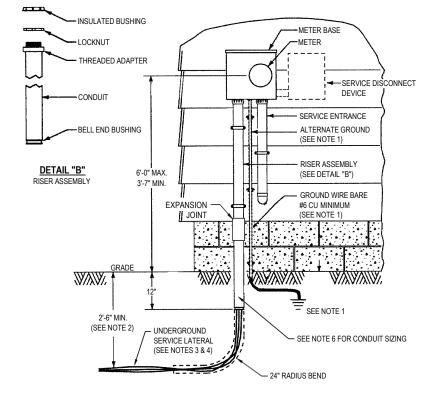

GENERAL CONDITION NOTES:

VOG WILL BE RESPONSIBLE FOR:

- (a) DESIGNATING THE LOCATION FOR THE TRENCH AND THE METER.
- (b) PROVIDING AND INSTALLING THE UNDERGROUND SERVICE LATERAL.
- (c) INSTALLING AND REMOVING THE METER.
- (d) MAKING THE CONNECTIONS IN THE METER BASE FOR THE UNDERGROUND SERVICE LATERAL (SEE DETAIL "A").

THE CUSTOMER WILL BE RESPONSIBLE FOR:

- (a) PROVIDING AND INSTALLING THE RISER ASSEMBLY. RISER ASSEMBLY TO CONSIST OF AN INSULATING BUSHING, LOCKNUT, THREADED ADAPTER, GALVANIZED OR SCHEDULE 40 PVC CONDUIT WITH BELL END AND CLAMP.
- (b) PROVIDING AND INSTALLING THE GROUND ROD, GROUND CLAMP, AND GROUND WIRE.
- (c) PROVIDING, INSTALLING, AND MAKING METER CONNECTIONS FOR THE SERVICE ENTRANCE CABLE.
- (d) SECURELY MOUNTING THE METER BASE IN A PLUMB POSITION.
- (e) INSTALLING AN EXPANSION JOINT ON EVERY RISER.

GENERAL CONSTRUCTION NOTES:

- (1) CUSTOMER GROUNDING WILL BE IN ACCORDANCE WITH NEC. THE GROUND WIRE SHALL BE CONNECTED TO THE METER SOCKET.
- (2) BURIAL DEPTH IS THE DISTANCE BETWEEN FINAL GRADE AND THE TOP OF THE BURIED CABLE OR CONDUIT. VOG SHALL SPECIFY THE REQUIRED BURIAL DEPTH TO CONFORM TO LOCAL REQUIREMENTS. THE BURIAL DEPTH SHALL NOT BE VOGS THAN 2'-6".
- (3) IF THE CUSTOMER DOES THE TRENCHING, THE TRENCH IS TO EXTEND NO CLOSER TO VOG' TRANSFORMER OR PEDESTAL THAN A DISTANCE SPECIFIED BY VOG. CUSTOMER TO DETERMINE LOCATION OF ALL UTILITIES BEFORE TRENCHING.
- (4) ADDITIONAL PVC CONDUIT AND A 24 INCH BEND MAY BE INSTALLED IN ORDER TO EXTEND CONDUIT BEYOND ANY GROUND LEVEL OBSTRUCTION (PATIO, DECK, DRIVEWAY, WALKWAY, ETC.). IF ADDITIONAL PVC CONDUIT IS REQUIRED TO CLEAR OBSTRUCTIONS, REFER TO VOG FOR APPROVED PVC USAGE.
- (5) METER SOCKET USED ON COMMERCIAL CUSTOMER SHALL HAVE A LEVER OPERATED BYPASS FOR THREE PHASE AND SINGLE PHASE.
- (6) 200 AMP SERVICE = 2" CONDUIT 400 AMP SERVICE - 3-1/2" CONDUIT


SINGLE PHASE UNDERGROUND SERVICE METER INSTALLATION

DATE: 21 May 2019





ALL SOCKETS ARE VIEWED FROM THE FRONT. ALL METERS ARE VIEWED FROM THE FRONT, NOT FROM THE BASE.





1Ø, 2 W CIRCUIT 1 STATOR, 2 W METER, SELF-CONTAINED





1Ø, 3 W CIRCUIT 1 STATOR, 1Ø, 3 W METER, SELF-CONTAINED


2 WIRE 120 VOLT SINGLE PHASE

3 WIRE 120/240 VOLT SINGLE PHASE

- 200A AND BELOW 1 PHASE
- RING OR RINGVOGS TYPE
- 4-TERMINAL FOR 1Ø, 3W, 600V, 200A CONTINUOUS DUTY
- PROVISIONS TO FIELD INSTALL 5TH TERMINAL IN 9 O' CLOCK POSITION
- GROUND LUG UP TO #2 CU/AL
- OH/UG FEED WITH OH HUB OPENING AND BLANK COVER
 - KNOCKOUTS IN THE FOLLOWING SIZES & POSITIONS:

ONE (1) 2 1/2" ON THE BACK PANEL AT THE BOTTOM CENTER ONE (1) 1/2" FOR EQUIPMENT GROUND IN BOTTOM PANEL

- NO BYPASS LEVER REQUIRED
- MINIMUM ENCLOSURE SIZE: 11" x 14" x 4 1/8"

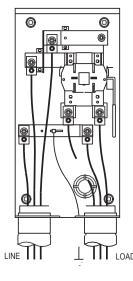

400A SOCKET (CLASS 320 METER)

- 1 PHASE
- 4-TERMINAL FOR 1Ø, 3W, 600V, 320A CONTINUOUS DUTY
- PROVISIONS TO INSTALL 5TH TERMINAL IN 9 O' CLOCK POSITION
- LINE CONNECTORS: #4-600 MCM CU/AL OR (2) 1/0-250 MCM CU/AL
- KNOCKOUTS IN THE FOLLOWING SIZES & POSITIONS: THREE (3) 3 1/2" ON THE BOTTOM PANEL


ONE (1) 1/2" FOR EQUIPMENT GROUND IN BOTTOM PANEL

- LEVER BYPASS REQUIRED
- MINIMUM ENCLOSURE SIZE: 13" x 28" x 4 7/8"

FOR 3 PHASE 400A SOCKET (CLASS 320 METER) SPECIFICATIONS PLEASE CONTACT VOG METER SERVICES DEPARTMENT

SELF-CONTAINED METER DIAGRAMS

DATE: 8 Feb 2018

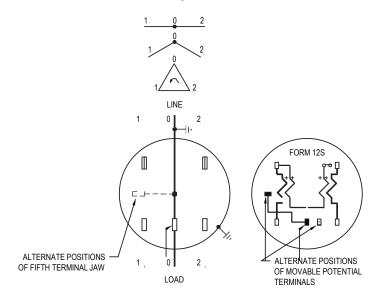


3 WIRE (NETWORK) 120/208 VOLT

2 STATOR, 3Ø, 3 W (NETWORK) METER, SELF-CONTAINED


- 200A AND BELOW 1 PHASE SOCKETS (120/208 VOLT)
- 5-TERMINAL FOR 1Ø, 3W, 600V, 200A CONTINUOUS DÚTY
- 5TH TERMINAL INSTALLED IN 9 O' CLOCK POSITION
- LINE/LOAD/NEUTRAL LUGS UP TO 350 MCM CU/AL
- GROUND LUG UP TO #2 CU/AL
- KNOCKOUTS IN THE FOLLOWING SIZES & POSITIONS: THREE (3) 2" ON THE BOTTOM PANEL
- ONE (1) 1/2" FOR EQUIPMENT GROUND IN BOTTOM PANEL
- MINIMUM ENCLOSURE SIZE: 11" x 14" x 4 1/8"

3 WIRE DELTA 240 VOLT 3-PHASE (MAINTENANCE ONLY)

ON 3-PHASE, 3-WIRE CIRCUITS, A GROUND IS OPTIONAL.
WHERE A 3-PHASE CIRCUIT IS GROUNDED, THE NEUTRAL
CONNECTOR IN THE SOCKET SHOULD BE GROUNDED.
WHERE A 3-PHASE CIRCUIT IS UNGROUNDED, THE NEUTRAL
CONNECTOR IN THE SOCKET SHOULD BE INSULATED.

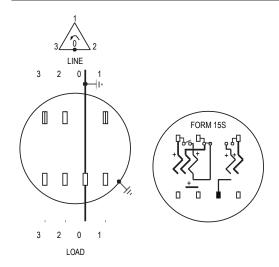

3Ø, 4 W, Δ CIRCUIT 2 STATOR, 3Ø, 4 W, Δ METER, SELF-CONTAINED

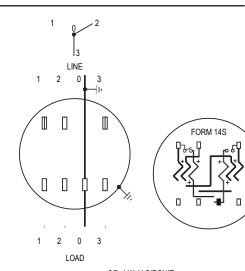

3Ø, 4 W, Y CIRCUIT 2 STATOR, 3Ø, 4 W, Y METER, SELF-CONTAINED (ALSO CALLED 2 1/2 STATOR)

4 WIRE WYE 120/208 VOLT 3 PHASE

4 WIRE DELTA 120/240 VOLT 3 PHASE

208 VOLT (WILD LEG) INSTALLED ON RIGHT HAND SIDE

- 200A 3 PHASI
- 7-TERMINAL FOR 3Ø, 4W WYE OR DELTA, 600V, 200A CONTINUOUS DUTY
- LINE/LOAD/NEUTRAL LUGS UP TO 350 MCM CU/AL
- GROUND LUG UP TO #2 CU/AL
- OH/UG FEED WITH OH HUB OPENING AND BLANK COVER
- KNOCKOUTS IN THE FOLLOWING SIZES & POSITIONS: TWO (2) 3" ON THE BOTTOM PANEL
 - ONE (1) 1/2" FOR EQUIPMENT GROUND IN BOTTOM PANEL
- LEVER BYPASS REQUIRED
- MINIMUM ENCLOSURE SIZE: 13" x 19" x 47/8"

SELF-CONTAINED METER DIAGRAMS

FIGURE: 10

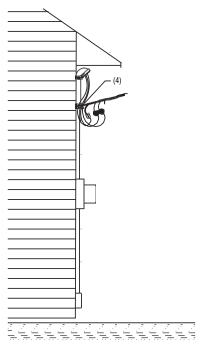


FIGURE 1: ATTACHMENT ON SIDE OF BUILDING

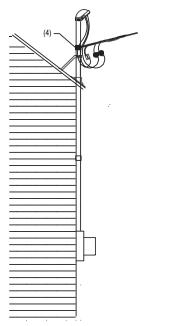


FIGURE 2: ATTACHMENT ON SERVICE RISER

SERVICE SIZE SPECIFICATIONS - TABLE A			
SERVICE SIZE (AMPS)	# OF ATTACHMENTS	1Ø CABLE TYPE	3Ø CABLE TYPE
150A OR VOGS	1	#2 TRIPLEX	#1/0 QUADRUPLEX
200/225A	1	#1/0 TRIPLEX	#1/0 QUADRUPLEX
400A	1	#4/0 TRIPLEX	#4/0 QUADRUPLEX
600A	2	#4/0 TRIPLEX	#4/0 QUADRUPLEX
800A	2	#4/0 TRIPLEX	#4/0 QUADRUPLEX
1000A	3	#4/0 TRIPLEX	#4/0 QUADRUPLEX
1200A	3	#4/0 TRIPLEX	#4/0 QUADRUPLEX
1400A	4	#4/0 TRIPLEX	#4/0 QUADRUPLEX
1600A	4	#4/0 TRIPLEX	#4/0 QUADRUPLEX
1800A	5	#4/0 TRIPLEX	#4/0 QUADRUPLEX
2000A	5	#4/0 TRIPLEX	#4/0 QUADRUPLEX

1Ø SERVICE CABLE TENSION - TABLE B (5)				
APPROX. SPAN LENGTH (6)	#2 TRIPLEX	#1/0 TRIPLEX	#4/0 TRIPLEX	
50' SPAN, ~2' SAG	235 LBS	280 LBS	371 LBS	
100' SPAN, ~3' SAG	627 LBS	747 LBS	989 LBS	
150' SPAN, ~5' SAG	847 LBS	1009 LBS	1335 LBS	

3Ø SERVICE CABLE TENSION - TABLE C (5)			
APPROX. SPAN LENGTH (6)	#1/0 QUADRUPLEX	#4/0 QUADRUPLEX	
50' SPAN, ~2' SAG	314 LBS	426 LBS	
100' SPAN, ~3' SAG	838 LBS	1136 LBS	
150' SPAN, ~5' SAG	1131 LBS	1533 LBS	

HOW TO USE THIS SPECIFICATION DIAGRAM:

- (1) FIND THE SERVICE SIZE ON THE SERVICE SIZE SPECIFICATIONS TABLE (TABLE A).
- (2) FOR A SINGLE-PHASE SERVICE, USE THE 1Ø CABLE TYPE COLUMN TO FIND THE SERVICE CABLE SIZE AND TYPE. THEN FIND THE NUMBER OF ATTACHMENTS FOR THE SERVICE SIZE IN THE # ATTACHMENTS COLUMN. FINALLY, LOOK UP THE SPECIFIED CABLE TYPE IN THE 1Ø SERVICE CABLE TENSION TABLE (TABLE B) AT THE APPROXIMATE SPAN LENGTH.
- (3) FOR A THREE PHASE SERVICE, USE THE 3Ø CABLE TYPE COLUMN TO FIND THE SERVICE CABLE SIZE AND TYPE. THEN FIND THE NUMBER OF ATTACHMENTS FOR THE SERVICE SIZE IN THE # ATTACHMENTS COLUMN. FINALLY, LOOK UP THE SPECIFIED CABLE TYPE IN THE 3Ø SERVICE CABLE TENSION TABLE (TABLE C) AT THE APPROXIMATE SPAN LENGTH.
- (4) ENSURE THE PULL-OUT STRENGTH OF THE CUSTOMER'S ATTACHMENT HARDWARE, WHEN USED WITH A PROPERLY SUPPORTED SERVICE RISER OR SPECIFIC BUILDING MATERIAL, IS GREATER THAN AND CAN WITHSTAND THE CONSTANT APPLIED TENSION SHOWN.
- (5) TENSION CALCULATED USING HEAVY LOADING CONDITIONS ON SUPPLY CABLE DETERMINED BY THE N.E.S.C. USING 1/2 INCH RADIAL ICE, 4 LBS/FT² (40 MPH) WIND, AND A 0.3 OVERLOAD CAPACITY FACTOR. THIS IS NOT THE INITIAL (INSTALLED) TENSION. THIS TENSION IS BASED ON WHAT CAN BE EXPECTED OF ICE-COVERED CABLES WITH WIND.
- (6) CONDUCTOR SAG AT DIFFERENT SPAN LENGTHS IS DETERMINED ON A CASE-BY-CASE BASIS WITH MAINTAINING CLEARANCE REQUIREMENTS THE TOP CONSIDERATION. THE AMOUNT OF SAG USED FOR THESE CALCULATIONS IS THE PRACTICAL MINIMUM SAG EXPECTED ON INSTALLED SUPPLY CABLE, REPRESENTING THE HIGHEST EXPECTED CABLE TENSION. CONDUCTOR SAG CAN VARY OVER TIME AND WITH CHANGES IN TEMPERATURE.

VILLAGE OF GREENWOOD ASSUMES NO RESPONSIBILITY FOR INJURY OR DAMAGE ARISING FROM USE OF THIS SPECIFICATION.

OVERHEAD SERVICE DROP CONNECTIONS
1Ø AND 3Ø - 480V OR VOGS

DATE: 21 May 2019
FIGURE: 11

RESIDENTIAL SINGLE PHASE - TABLE A			
TOTAL MAIN SWITCH	CABLE SIZE (AMPS)	CONDUIT SIZE	CT CABINET SIZE (MINIMUM)
100/150 AMP	1/0 AL (242A)	2" PVC	
REWIRE 100/150 AMP TO 200/225 AMP	1/0 AL (242A)	2" PVC	
200/225/300 AMP - NEW	3/0 AL (315A)	2" PVC	
400 AMP (320 AMP METER) (SEE NOTE 1)	350 MCM (472A)	3-1/2" PVC	
400 AMP CT (SEE NOTE 1)	350 MCM (472A)	3-1/2" PVC	30" x 26" x 10"
600 AMP CT	(2) 3/0 (630A)	(2) 2" PVC	30" x 26" x 10"
800 AMP CT	(2) 350 MCM (944A)	(2) 3-1/2" PVC	36" x 36" x 11"



NOTES:

400A - CT

320A - METER

400A - CT

- USING A 400 AMP SELF-CONTAINED METER SOCKET IS PREFERRED FOR RESIDENTIAL. THE SELF-CONTAINED METER SOCKET IS RATED 400 AMPS, BUT THE kWH METER IS 320 AMPS. A CURRENT TRANSFORMER (CT) CABINET IS AN ALTERNATE IF THE CUSTOMER SO DESIRES - IT IS NOT AN VOG REQUIREMENT. THE CT CABINET CAN BE USED ON AN ACREAGE WHERE NUMEROUS CUSTOMER LOADS ARE BEING FED FROM A SINGLE POINT.
- AVAILABLE FAULT CURRENT MAY LIMIT THE USE OF A SELF-CONTAINED METER SOCKET.

NC RU	

 (B)

COMMERCIAL SINGLE PHASE - TABLE B SECONDARY CONDUIT ENTRANCE SIZE (AMPS) NUMBER SIZE 100 & 150 200 & 225 320A - METER) 400 3-1/2' 600 1 3-1/2' 800 2 3-1/2" 1000 2 3-1/2" 1200 3-1/2" 3

NOTES:

- SIZE DUCTS AND CONDUCTOR FOR THE SUM OF THE SERVICE ENTR EQUIPMENT SIZES WHEN EACH IS 400A OR LARGER AND THE DUCTS
- DUE TO SPACE AND CONNECTOR LIMITATIONS, 6 SETS OF CONDUCTORS IS THE MAXIMUM THAT CAN BE INSTALLED TO A 1Ø PADMOUNT TRANSFORMER.
- VARIATIONS FROM THIS GUIDELINE MAY BE REQUIRED FOR IMPROVED VOLTAGE REGULATION OR OTHER REASONS.

ИΟ.	TE	<u>S</u> :	



SECONDARY CONDUIT ENTRANCE SIZE (AMPS) NUMBER SIZE 2-1/2" 225 400 1 3-1/2" 2 3-1/2' 600 3-1/2" 800 3 1000 3 3-1/2" 1200 4 3-1/2' 1400 5 3-1/2" 3-1/2" 1600 5 1800 6 3-1/2"

7

3-1/2'

2000

COMMERCIAL THREE PHASE - TABLE C

- (6) SETS ARE ALL 4 - 1/C.
- AMPACITY RATING IS BASED ON VOG COMPUTER PROGRAM DATA FOR XLPE CABLE IN SCHEDULE 40 PVC BURIED 36" IN A 20° AMBIENT, 100 RHO EARTH AND A MAXIMUM CONDUCTOR TEMPERATURE OF 90°C OR 60°C INTERFACE 50% OR 75% LOAD FACTOR, PER SET.
- TABLE C IS FOR MINIMUM CABLE AND CONDUIT REQUIREMENTS FOR THE SWITCH SIZE SHOWN. IF REQUIRED DUE TO LOAD, LOAD FACTOR AND PEAK DURATION, POWER FACTOR, VOLTAGE REGULATION, BOLT LOCKED SWITCH, OR OTHER REASONS, THE CABLE SETS AND POSSIBLY NUMBER OF CONDUITS CAN BE INCREASED. LOAD ON SWITCHES OVER 2000 A SHOULD HAVE CONDUIT AND CABLE SIZED PER VOG ENGINEERING. SPECIAL CONSIDERATION MUST BE GIVEN TO LOADS THAT APPROACH OR EXCEED MAXIMUM TABLE VALUES.
- SIZE DUCTS AND CONDUCTOR FOR THE SUM OF THE SERVICE ENTRANCE EQUIPMENT SIZES WHEN EACH IS 400A OR LARGER AND THE DUCTS RUN ADJACENT TO EACH OTHER.

	CARLE AND CONDUIT OREGISIOATIONS	DATE: 21 May 2019
CABLE AND CONDUIT SPECIFICATIONS	FIGURE: 12	



619 Main Street, P.O. Box xxxx Greenwood, NE 68366